

# mf bond it



## MULTI-FLOORING ADHESIVE

**MF Bond It's** safe, 1-part chemistry makes it a faster, more install-friendly alternative to 2-part epoxy systems. Engineered for heavy rolling loads and challenging environments, it's waterproof design forms a robust moisture vapor barrier and can also take the punishment introduced by topical liquids.

## PERFECT FOR

PERMANENT FLOORING INSTALLATION

### individual sizes


7.57 l (2 gal.)

### total weight

12.25 kg (27 lbs.)

### recommended trowel types

- Square Notch  
1.6 mm. x 1.6 mm. x 1.6 mm.  
1/16" x 1/16" x 1/16"
- U Notch  
1.6 mm. x 0.8 mm. x 0.8 mm.  
1/16" x 1/32" x 1/32"
- V Notch  
3.2 mm. x 3.2 mm. x 1.6 mm.  
1/8" x 1/8" x 1/16"

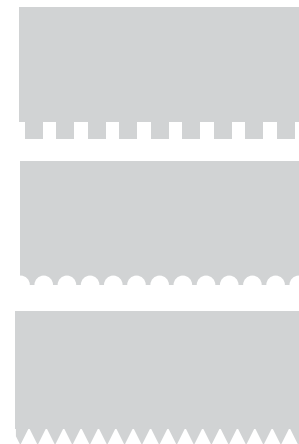

Tools not to scale



edmonton  
vancouver  
toronto  
edgewoodgroup.ca

CALL FOR DETAILS OR TO REQUEST A SAMPLE

**1.800.668.1776**

P 780.466.2084 • F 780.468.9104  
E [inquiries@edgewoodgroup.ca](mailto:inquiries@edgewoodgroup.ca)

July 21, 2021



# mf bond it



CERTIFIED BY  
SCS Global Services

## square notch

Approved Flooring Types:

Sheet goods, Rubber tile and sheet, Linoleum, WPC/WSC, Stair treads (rubber and vinyl), TPE

Estimated Coverage

3.7–4.4 m<sup>2</sup>/l  
150–180 ft<sup>2</sup>/gal

## u notch

Approved Flooring Types:

LVT/LVP, VCT/VET, recycled rubber, bitumen, EM rubber

Estimated Coverage

3.7–3.9 m<sup>2</sup>/l  
150–160 ft<sup>2</sup>/gal

## v notch

Approved Flooring Types:

Foam backing, latex

Estimated Coverage

2.0–2.2 m<sup>2</sup>/l  
80–90 ft<sup>2</sup>/gal

## PRODUCT INFORMATION

**RH 100%**

**pH 5–14**

**MVER N/A**

**OPEN TIME  
0 H**

**WORKING TIME  
45 MIN**

**CURE TIME  
6 H**

**ΔIIC 18 dB**

**ROLLING LOADS  
8 H**

**LIGHT TRAFFIC  
3 H**

**HEAVY TRAFFIC  
4 H**



edmonton  
vancouver  
toronto  
edgewoodgroup.ca

July 21, 2021

CALL FOR DETAILS OR TO REQUEST A SAMPLE

**1.800.668.1776**

P 780.466.2084 • F 780.468.9104  
E [inquiries@edgewoodgroup.ca](mailto:inquiries@edgewoodgroup.ca)

# mf bond it



## ADHÉSIF MULTI-SOLS

La chimie en une partie de **MF Bond It** en fait une alternative plus rapide et plus facile à installer que les systèmes époxydiques en deux parties. Conçu pour les lourdes charges roulantes et les environnements difficiles, la conception imperméable à l'eau MF Bond It forme un pare-vapeur robuste et peut également supporter la pression introduite par les liquides topiques.

## PARFAIT POUR


INSTALLATION DE REVÊTEMENT  
DE SOL PERMANENT

**tailles individuelles**  
7.57 l (2 gal.)

**pois total** 12.25 kg (27 lbs.)

### types de truelle recommandés

- Encoche carrée  
1.6 mm. x 1.6 mm. x 1.6 mm.  
1/16" x 1/16" x 1/16"
- Encoche en U  
1.6 mm. x 0.8 mm. x 0.8 mm.  
1/16" x 1/32" x 1/32"
- Encoche en V  
3.2 mm. x 3.2 mm. x 1.6 mm.  
1/8" x 1/8" x 1/16"

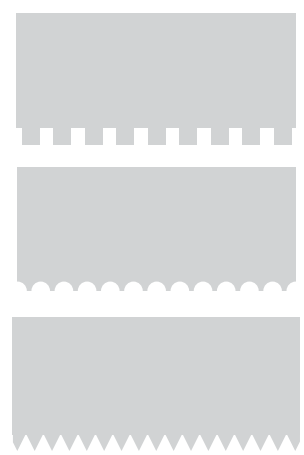

Outils à ne pas dimensionner



edmonton  
vancouver  
toronto  
edgewoodgroup.ca

July 21, 2021

POUR DEMANDEZ DES DÉTAILS OU UN ÉCHANTILLON, APPELEZ AU

**1.800.668.1776**

T 780.466.2084 • F 780.468.9104  
C inquiries@edgewoodgroup.ca

# mf bond it



CERTIFIED BY  
SCS Global Services

## encoche carrée

Types de revêtements de sol homologués

Panneaux, carreaux et feuilles de caoutchouc, linoléum, WPC/WSC, marches d'escalier (caoutchouc et vinyle), TPE

Couverture estimée

3.7–4.4 m<sup>2</sup>/l  
150–180 pi<sup>2</sup>/gal

## encoche en U

Types de revêtements de sol homologués

CVL/PVL, VCT/VET, caoutchouc recyclé, bitume, caoutchouc EM

Couverture estimée

3.7–3.9 m<sup>2</sup>/l  
150–160 pi<sup>2</sup>/gal

## encoche en V







Types de revêtements de sol homologués

Endos en mousse, latex

Couverture estimée

2.0–2.2 m<sup>2</sup>/l  
80–90 pi<sup>2</sup>/gal

## INFORMATION PRODUIT

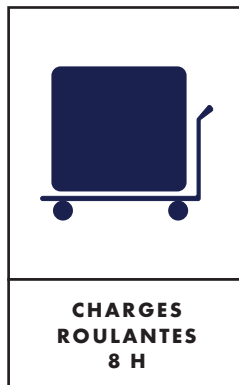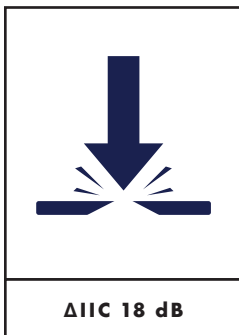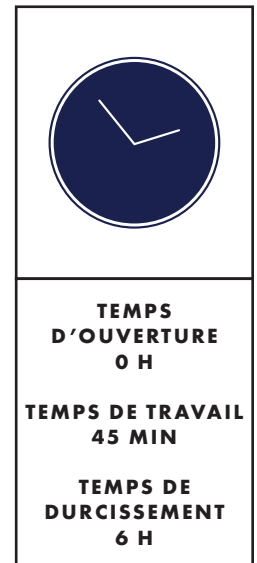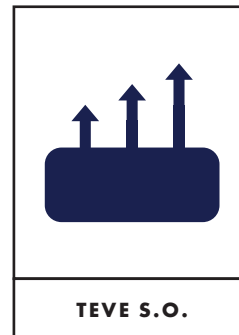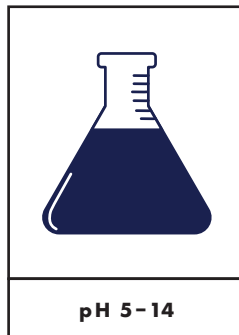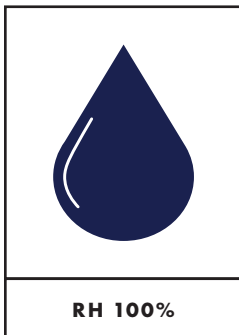

edmonton  
vancouver  
toronto  
edgewoodgroup.ca

July 21, 2021

POUR DEMANDEZ DES DÉTAILS OU UN  
ÉCHANTILLON, APPELEZ AU

**1.800.668.1776**

T 780.466.2084 • F 780.468.9104  
C [inquiries@edgewoodgroup.ca](mailto:inquiries@edgewoodgroup.ca)